




## Application Guide for Commercial Filters

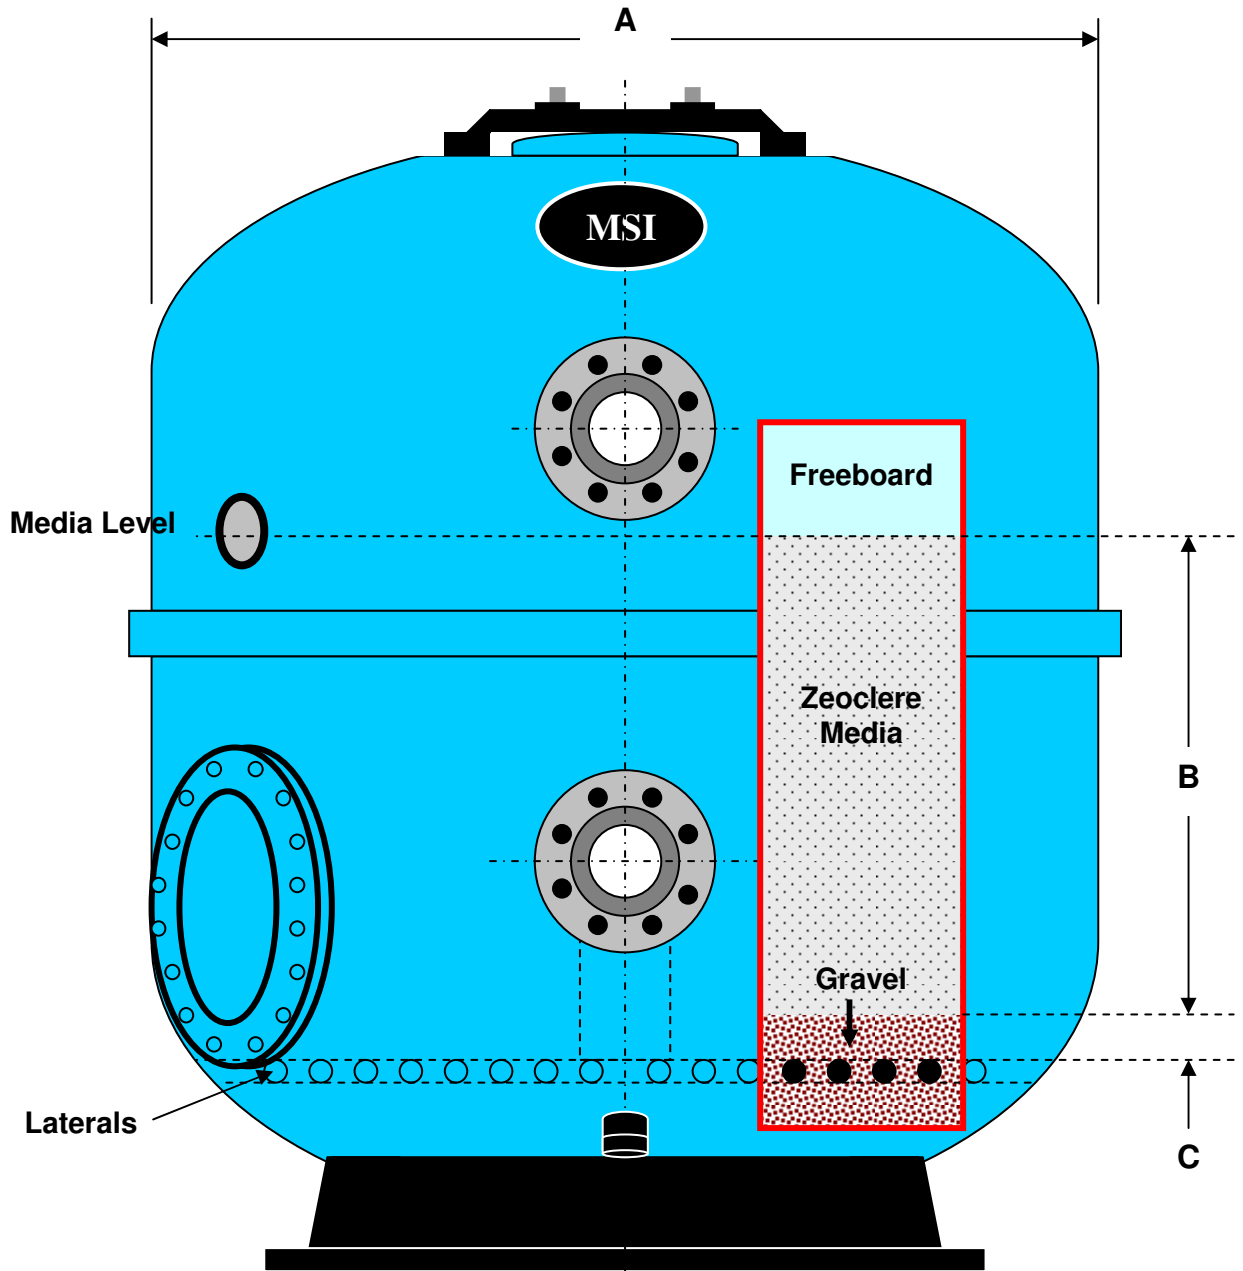

Based on: Lateral Under-drain – 40” (1000mm) bed depth

A – Filter Ø	40”	48”	56”	63”	72”	79”	92”	98”	118”
Surface ft <sup>2</sup>	8.4	12.16	16.14	21.5	26.9	33.8	46.3	54	75
B – Depth	35”	35”	35”	35”	35”	35”	35”	35”	35”
C – Depth	4”	4”	4”	4”	4”	4”	4”	4”	4”
¼” gravel - lbs	550	770	990	1320	1650	2100	2870	3300	3860
Zeoclere lbs	1650	2315	3086	4078	5180	6614	9040	10580	14880

This information is intended as a guide only and you should check with individual manufacturer’s specification to ensure correct volumes & weights are maintained. Zeoclere will replace sand at 80% of the specified sand weight.